


# Softbox Assembly Instructions



- 1.Inner Diffusor
- 2.Speedring
- 3.Hood
- 4.Metal Rods(4 rods)
- 5.Outer Diffuser

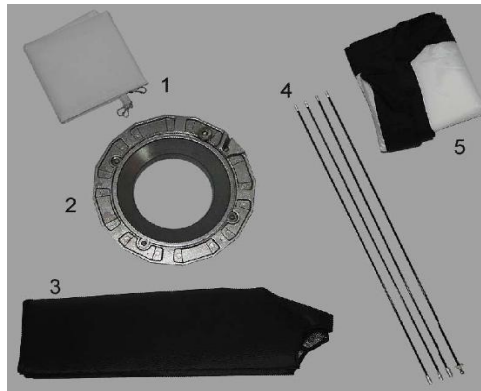

Detach the Velcro of the hood at 4 sides and spread it out. Please note that the rod with bead end and metal ring should be positioned to the special opening in the speedring.



Insert 3 rods(without the bead) through the loops at the middle of the hood and then the speedring. Then insert the other end of the 3 rods into the loops at the corners of the hood.



Insert the 4th rod(with the bead) through the 4th loop as above and put the bead end into the the hole of speedring, Make sure the metal stud is fully and securely inserted. Then the shape of the softbox will be formed.



Clip the inner diffuser into the softbox.



Stick the outer diffuser to the outer rim of the velcro of the hood.