


F-002 LED-320A 英文说明书
 材质：80g书纸单色正反印刷
 尺寸：207.5*142 mm



LED320SS+ [Super Slim Rechargeable LED Light]

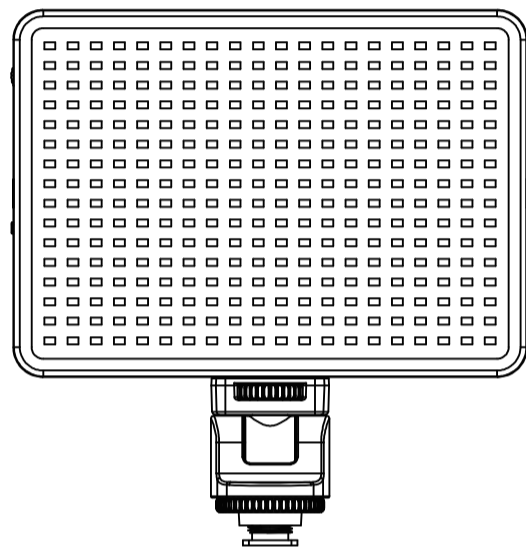

REV.2

SAFETY PRECAUTIONS

1. Please keep the LED320SS+ away from moisture and liquids.
2. Do not touch with wet hands.
3. Avoid contact with solvents, gasoline, grease, oil, paint and detergents.
4. Disconnect from power when not in use.
5. Do not open the housing or attempt to repair yourself.
6. Do not operate near flammable liquids.
7. Use only the included charger.

CHARGING THE BATTERY

Before using the LED320SS+ you should fully charge the battery. Use the included AC adapter to connect the Charging Port (4) to a wall AC outlet. The lights on the Battery Level Gauge (2) will begin to flash indicating the internal battery's charge level. When all of the LEDs in the Battery Level Gauge (2) glow solid, the battery is fully charged. Now the LED320SS+ is ready for use.

USING THE LIGHT

To use the LED320SS+, mount it on the included cold foot or any male 1/4"-20 threaded grip item.

Turn the light on by sliding the Power Switch (3).

Adjust the LED320SS+ to the desired brightness using the Brightness Control Knob (1).


For a softer light, clip the Clear Diffusion Panel on the front of the LED320SS+. Or attach the Amber Diffusion Panel to convert the color temperature to 3200K.

As the battery becomes depleted, the Battery Level Gauge lights (2) will go out one by one. When the last light is blinking, the power is low and the LED320SS+ will shut down. Please recharge the battery.

Thank you for your purchase of the PROMASTER LED320SS+ SUPER SLIM RECHARGEABLE LED LIGHT.

Please read and follow these instructions when using the LED320SS+ for safety, proper operation, and maximum enjoyment.

PARTS IDENTIFICATION

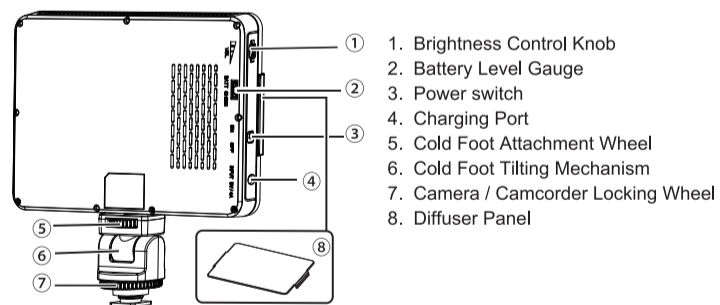

1. Brightness Control Knob
2. Battery Level Gauge
3. Power switch
4. Charging Port
5. Cold Foot Attachment Wheel
6. Cold Foot Tilting Mechanism
7. Camera / Camcorder Locking Wheel
8. Diffuser Panel

SPECIFICATIONS

LED Quantity	320
Charging Voltage	5V /4A
Power (W)	25W
Brightness	1100 LUX at 3' / 1m
Dimmer	7-100%
Color Temperature	5600/3200K +/- 250k
Battery	Lithium-Polymer 8000mAh
Dimensions	175 mm x 125 mm x 19 mm
Weight	12.4 oz / 350 g (not including cold foot or diffusion panels)

*One Year
 Unconditional Warranty*

If for any reason, this ProMaster product fails within ONE YEAR of the date of purchase, return this product to your ProMaster dealer and it will be exchanged for you at no charge. ProMaster products are guaranteed for ONE FULL YEAR against defects in workmanship and materials. If at any time after one year, your ProMaster product fails under normal use, we invite you to return it to ProMaster for evaluation.

WWW.PROMASTER.COM | FAIRFIELD CT 06825

